

SMART DISPLAY MODULE SPECIFICATION

1.5 Inch Smart Knob Display with Touch	
Model:	UEDX46460015-WB-A
Version:	V1.1
Date:	2024-10-16

Customer Confirmation

Approved by	Notes

REVISION HISTORY

Revision	Date	Contents of Revision Change	Remark
V1.0	20241010	Preliminary release	
V1.1	20241016	Add GitHub project links, and environment configuration links	

TABLE of CONTENTS

1. INTRODUCTION	4
1.1 Features	4
1.2 Appearance picture	5
2. PRODUCT INFORMATION	6
2.1 Connector Interface Description	6
2.2 Display interface description	6
2.3 Display Information	7
2.4 Voltage & Current	8
2.5 Reliability Test	8
2.6 Related software	8
3. MECHANICAL DRAWING	9
4. RELATED DOWNLOADS	10
4.1 Arduino and IDF relevant information	10
4.2 Libraries required for Arduino	10

1. Introduction

1.1 Features

Brief Info:

- 1) Outline Dimension: ϕ 51.6 Round
- 2) Interaction Method: Rotate and Press
- 3) Shell Color: Black/Silver/Customized
- 4) Power: DC 5V, 100mA

System

- 1) OS: RTOS
- 2) CPU: ESP32-S3 240Mhz
- 3) RAM: 8MB
- 4) Flash: 16MB
- 5) Interface: UART/USB
- 6) Support 2.4GHz Wi-Fi、BLE 5、BLE Mesh

Note: The Bluetooth and WIFI functions are still under test, we will complete them as soon as possible, please forgive the inconvenience caused to you


Display

- 1) Size: 1.5 Inch
- 2) Resolution: 466*466
- 3) Mode: AMOLED
- 4) Driver IC: CO5300AF-42
- 5) Interface type: QSPI
- 6) Brightness: 1000 cd/m²
- 7) Touch IC: CST820

Other

- 1) Operation Temperature: -20~60°C
- 2) Storage Temperature: -30~70°C

1.2 Appearance picture

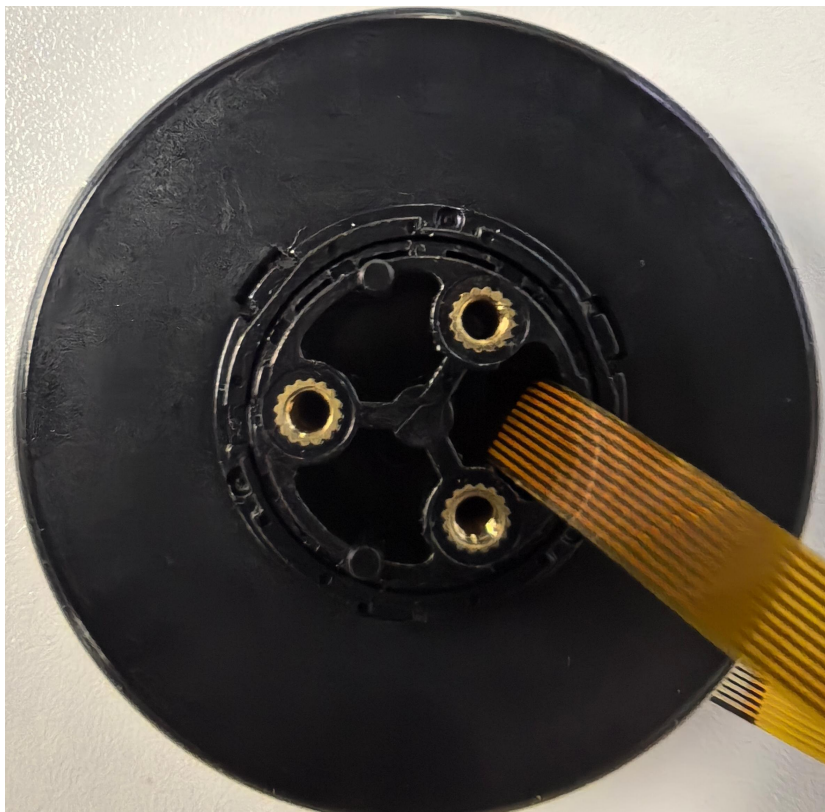

2. Product information

2.1 Connector Interface Description

Pin NO.	Symbol	Description	Voltage Range	Remarks
1	VCC	Power 5V	5V	
2	GPIO38	GPIO38	-	
3	GND	Grounds	0V	
4	GPIO40	GPIO40	-	
5	GPIO39	GPIO39	-	
6	RX	UART Receive	0-3.3V	
7	TX	UART Transmit	0-3.3V	
8	CHIP-EN	CHIP-EN	0-3.3V	
9	D+	USB D+	3.3V	
10	D-	USB D-	3.3V	

The connector specifications is 10PIN 0.5mm pitch

2.2 Display interface description

Pin No.	Symbol	I/O	Description
1	VCI_EN	P	Power supply
2	NC	-	-
3	NC	-	-
4	NC	-	-
5	QSPI_SI03	I	QSPI Data3 input pin
6	QSPI_SI02	I	QSPI Data2 input pin
6	QSPI_SI01	I	QSPI Data1 input pin
7	QSPI_SI00	I/O	QSPI Data0 input pin
9	NC	-	-
10	SCL	I	SPI pclk input signal
11	NC	-	-
12	CS	I	Chip selection pin. Low-active

13	GND	P	Power Ground
14	TE	O	Tearing effect signal is used to synchronize MCU to frame memory
15	IOVCC	P	Power supply to the internal logic power regulator
16	MTP(NC)	-	-
17	VBAT	P	Power supply
18	RST	I	The signal will reset the LCM, Signal is active low.
19	TP_SCL	I	I2C clock signals for CTP
20	TP_SDA	I/O	I2C data signal for CTP
21	TP_RST	I	The signal will reset the CTP,Signal is active low
22	TP_INT	I	Interrupt signals for CTP
23	TP_VCC	P	Power supply for TP
24	GND	P	Power Ground

2.3 Display Information

Item	Parameter	Description
Color	16.7M colors	24bits
AA	38.3052*38.3052	1.51 inch
Resolution	466*466	Round
Brightness	1000cd/m2	-
Interface Mode	QSPI	-
Driver IC	CO5300AF-42	-
Pixel Driving element	AMOLED	-

2.4 Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	DC	4.0	5.0	5.5	V
Operation Current	VCC= +5V, Maximum backlight current	50	100	150	mA
	VCC= +5V,backlight off	-	50	-	mA
Recommended power supply:5V 1A DC					


2.5 Reliability Test

Item	Conditions	Min	Typ	Max	Unit
Working Temperature	60%RH at 5V voltage	-20	25	60	C
Storage Temperature	---	-30	25	70	C
Working Humidity	25°C	10%	60%	90%	RH
ESD	---	Contact: ±4KV Air: ±8KV			KV

2.6 Related software

Software name	Version	Software associated configuration	Development environment configuration link
Arduino IDE	3.0.7	<ol style="list-style-type: none"> Board: ESP32S3 Dev Module CPU Frequency: 240MHz (WiFi) Flash Frequency: NO Flash Mode: QIO 80MHz Flash Size: 16MB (128Mb) Partition Scheme: Default 4MB with spiffs (1.2MB APP/1.5MB SPIFFS) PSRAM: OPI PSRAM Programmer: Esptool 	ESP32-Arduino config (github.com)
ESP-IDF	5.3	Once configured, no configuration is required (If you have any problem with the configuration, please contact us, we will help you)	ESP-IDF config (github.com)

3. MECHANICAL DRAWING

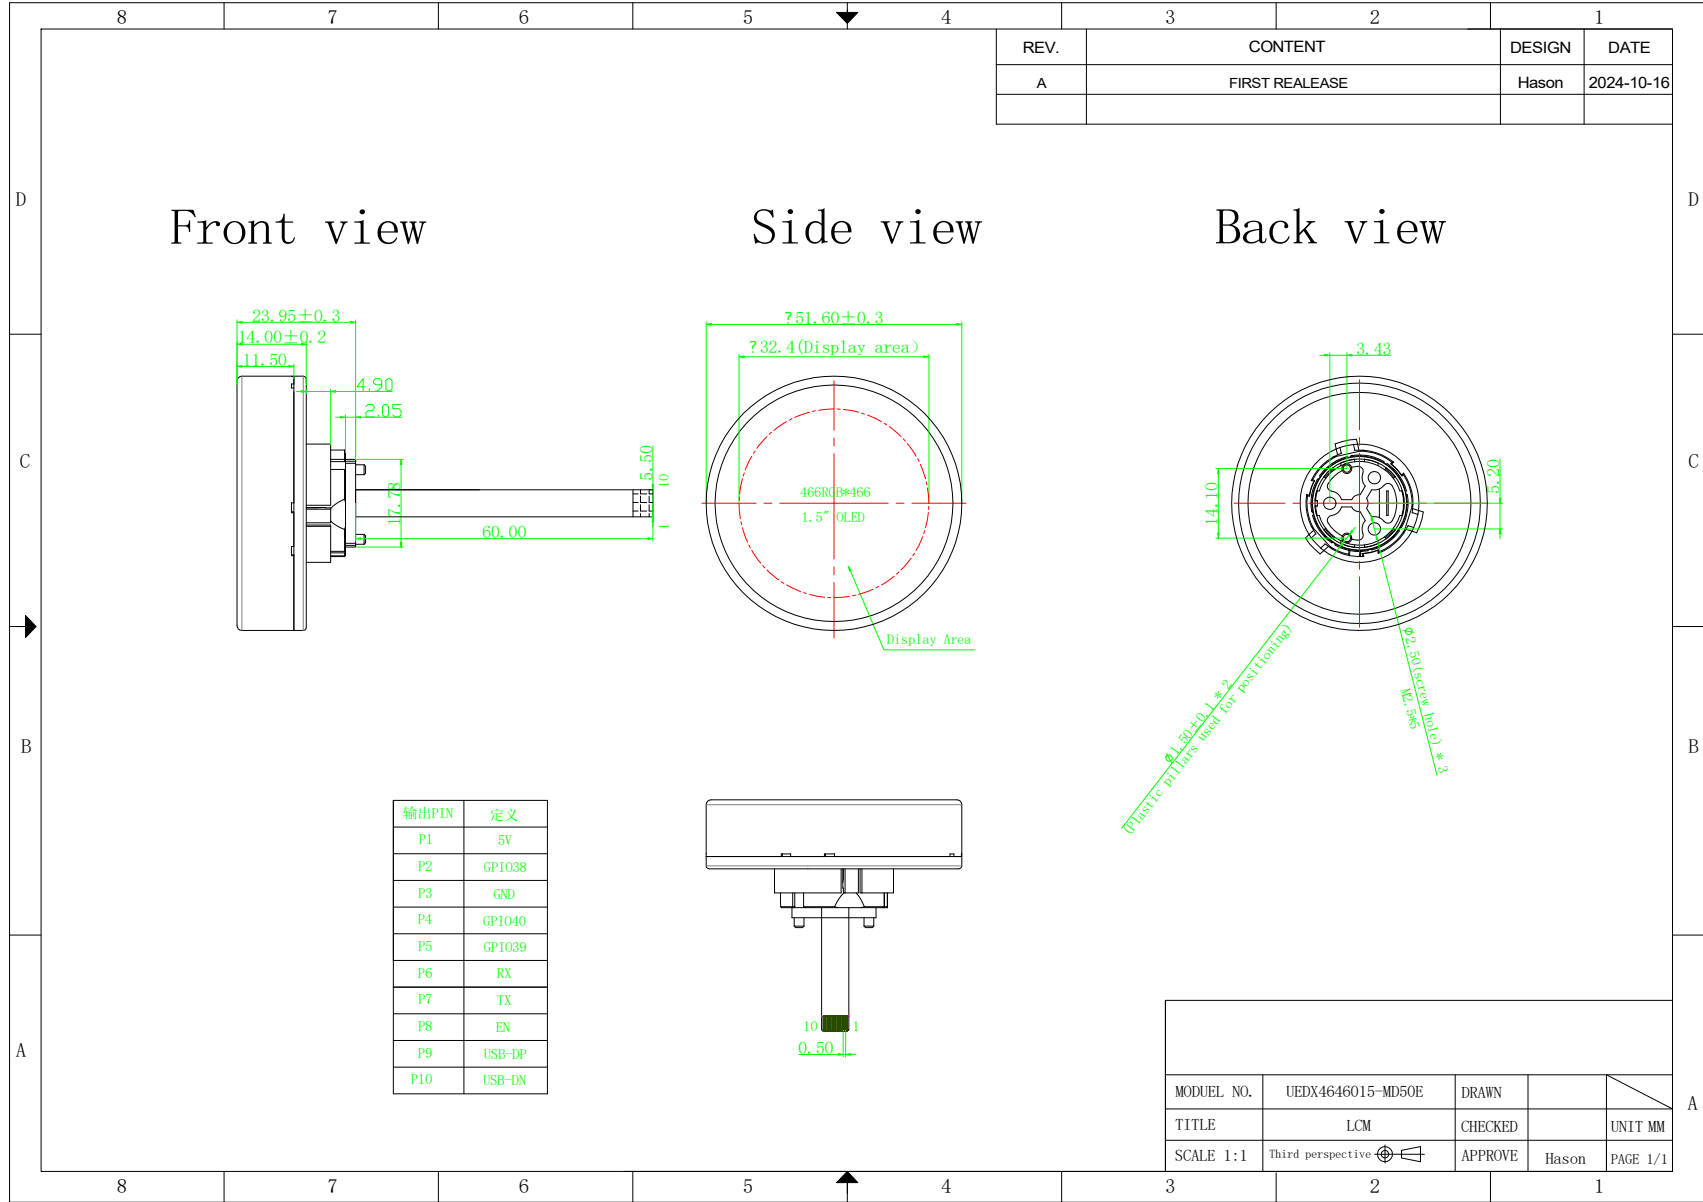

REV.	CONTENT	DESIGN	DATE
A	FIRST REALEASE	Hason	2024-10-16

MODUEL NO.	UEDX4646015-MD50E	DRAWN	
TITLE	LCM	CHECKED	UNIT MM
SCALE 1:1	Third perspective	APPROVE	Hason PAGE 1/1

4. Related downloads

4.1 Arduino and IDF relevant information

<https://github.com/VIEWESMART/UEDX46460015-MD50ESP32-1.5inch-Touch-Knob-Display>

4.2 Libraries required for Arduino

<https://github.com/VIEWESMART/UEDX46460015-MD50ESP32-1.5inch-Touch-Knob-Display/tree/main/Libraries>